


## **TILT** (Rotating Ends) **T8 LED TUBES 2ft-8ft**

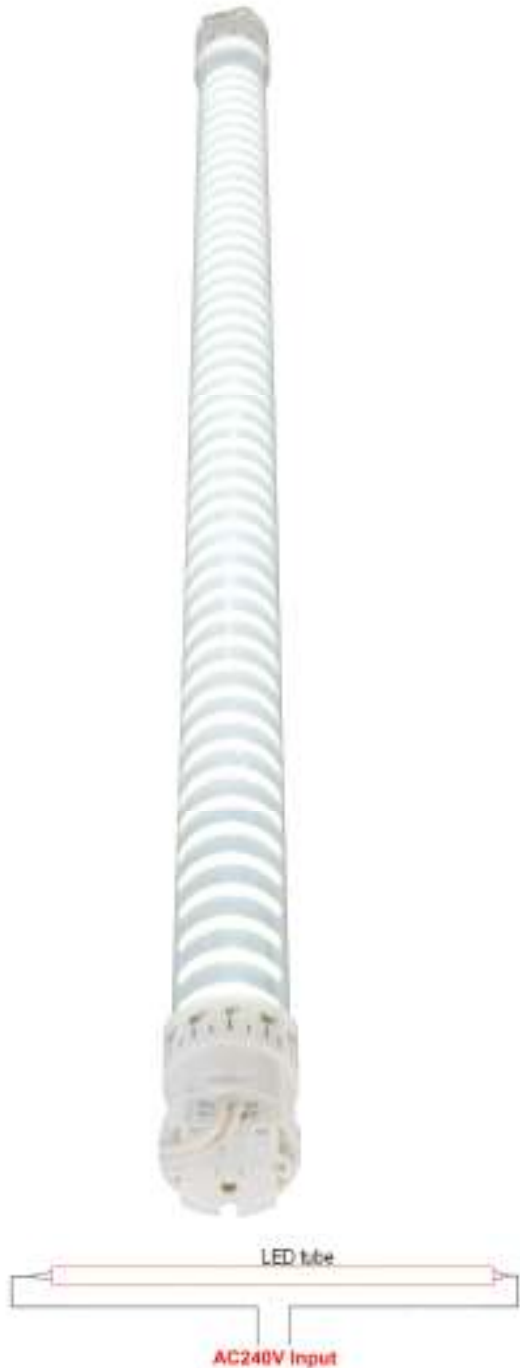

- T8 LED Replacement tubes
- SMD and Lumilux LEDs for performance, minimum light deterioration and high colour consistency
- Rotating Ends to suit various lampholders, Fully illuminated walls and Safety locking mechanism
- Full Aluminium casing and PCBs for high heat dissipation to prolong Tube life
- Semi Opal/Clear Lined Polycarbonate diffusers
- 30000 Hr in Enclosed Fittings. 50000 Hr in Exposed/Louvered fittings
- Works with conventional Switch-Start ballasts without Starters or direct from mains by bypassing Electronic Ballasts. See wiring instructions.
- Available in other colours including
- Warm White on Special Orders.
- CRI 80

Part Number	DI-T82RCW	DI-T83RCW	DI-T84RCW	DI-T85RCW	DI-T86RCW	DI-T88RCW
Size	2ft	3ft	4ft	5ft	6ft	8ft
Wattage (Nominal)	10W	15W	20W	24W	30W	38W
Colour	DAYLIGHT	DAYLIGHT	DAYLIGHT	DAYLIGHT	DAYLIGHT	DAYLIGHT
Colour Temperature	6000K	6000K	6000K	6000K	6000K	6000K
Input Power	100-240v AC	100-240v AC	100-240v AC	1100-240v AC	100-240v AC	100-240v AC
Input Device	Mains	Mains	Mains	Mains	Mains	MAINS
Tube Connection	T8/T10 Holders	T8/T10 Holders	T8/T10 Holders	T8/T10 Holders	T8/T10 Holders	T8/T10 Holders
Dimmable	No	No	No	No	No	No
Lumens	1100	1500	2200	2463	3300	4100
Wattage (Nominal)	10W	15W	20W	24W	30W	38W
Light View Angles	120°	120°	120°	120°	120°	120°
LED Type	SMD	SMD	SMD	SMD	SMD	SMD
No of LEDs	48	69	100	125	138	200

31

Fluorescent equivalent	18W	30W	36W	58W	70W	100W
------------------------	-----	-----	-----	-----	-----	------

Lamp-Life is affected by surrounding levels of Heat, Ventilation, Humidity and Air Particles

Avoid placing lamps in fixtures a) Without facilities for heat dissipation b) Where internal condensation is present c) Powered by Electronic Low Voltage Halogen Transformer