

**HOW THE SOLAR POWERED LIGHT WORKS**

During the day, the solar panel of the top converts sunlight into electricity and recharges the battery.

SPIKE 3 comes with integral On/Off switch and photocell unit.


SPIKE 3 should be exposed to at least 5 hours sunlight prior to initial use.



Deltech UK Ltd  
 Unit 5, Mill Hill Industrial Estate,  
 Flower Lane  
 Mill Hill, London NW7 2HU  
 TEL 020 8906 2099 FAX 020 8906 8383  
 www.deltechuk.com




**DELTECH FLAME EFFECT SOLAR LED SPIKELIGHT** INTEGRATED LED'S

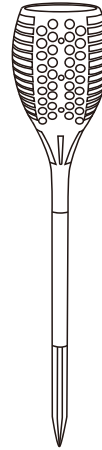

**SPIKE 3**

Please read the user guide before use

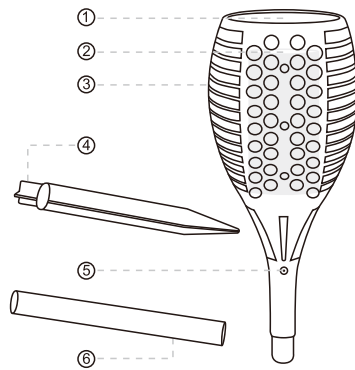

- ① Solar panel
- ② LED lamp
- ③ ABS body
- ④ ABS ground spike
- ⑤ On/Off switch
- ⑥ ABS Extension Rod

**Solar Light**  
 (Excluding Extension Rod and Spike)

Material : ABS  
 Full Size: 110mm Diameter. Height 290mm  
 LI-Ion battery: 2200mAh  
 Solar Panel 0.88w. Efficiency 17%. 90mm Diameter  
 Solar charging time: 8Hrs Life span 5 Years  
 LED: 3528\*96PCS **INTEGRATED LED'S**  
 Lumens: 35 lm  
 LED span life: 50,000Hrs  
 Auto Dusk to Dawn Operation.  
 Protections: Over Current / Short Circuit /  
 Over Charge/ Fast Discharge

**ABS Extension Rod: 320mm x Φ20mm**

**ABS Spike: 180mm x Φ20mm**

**PACKAGING INFORMATION**

size:cm



**GW: 0.45KG**

1pc / box

**NW: 5.4KG**

0.45KG x 12pcs

