


Light Source Test Report

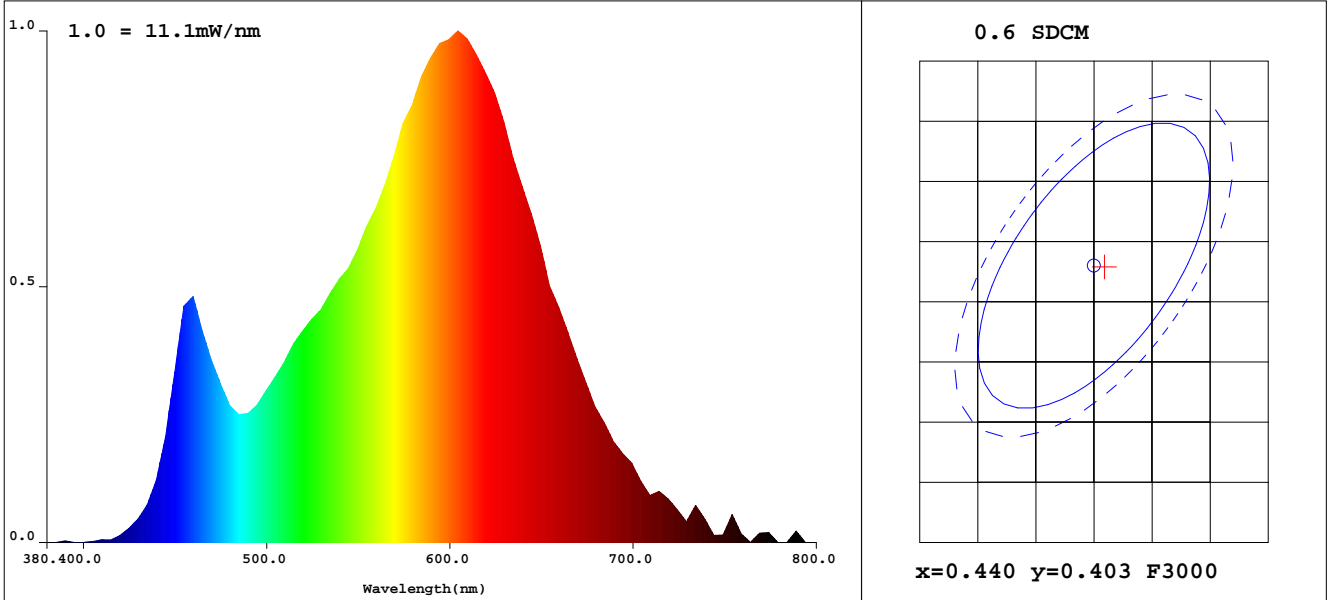

CIE Color Parameters:

Chromaticity Coordinate: x=0.4409 y=0.4029/u=0.2537 v=0.5215(duv=-9.89e-004)

CCT:Tc= 2925K Prcp WaveL: dλ=583.5nm Purity=53.3%

Peak WaveL: λp=605nm Half Width: Δλ=117.8nm Ratio:R=23.4% G=73.6% B=3.0%

Average Wave: 590nm

Rendering Index:Ra=81.7

R1 =81	R2 =94	R3 =93	R4 =77	R5 =81	R6 =92	R7 =80	R8 =56
R9 =5	R10=85	R11=76	R12=74	R13=84	R14=97	R15=73	

Photo Parameters:

Flux: Φ=528.62(lm) Luminous Efficacy: 87.87(lm/W) Luminous Power:P=1.614(W)

Electrical Parameters:

U=229.3V I=0.0480A P=6.016W PF=0.547

Instrument Status:

Scan Range:380.0nm-800.0nm
REF = 20783

Interval:5.0nm

Ip = 292(G=2,D=52)

TMP(PMT) = 23.0degrees centigrad/Test Mode: Fast Test

Product Type:GU10-COBD6WW
Instrument:PMS-80 System
Temperature:150.0deg
Test Operator:Damin

Manufacturer:
Test Department:
Humidity:65.0%
Test Date:2016-03-05 08:48